



SUBMITTAL SHEET

www.aerosonics.com



SOUND ATTENUATOR

TUBULAR
DOUBLE WALL
LOW FREQUENCY
FIBERGLASS FILL

PRODUCT FEATURES


- **FILL:** Fiberglass under compression
- Tested in accordance with ASTM E-477
- **ASTM-E84 Rating Characteristics:**
Flamespread - 10
Smoke Developed - 10

CONSTRUCTION FEATURES


- Casing:**
12" - 24" 22 GA. Galvanized Steel
26" - 60" 18 GA. Galvanized Steel
- Baffle:**
24 GA. Perforated Galvanized Steel

MODELS

- LRA-R**
 LRB-R
 LRC-R



End View

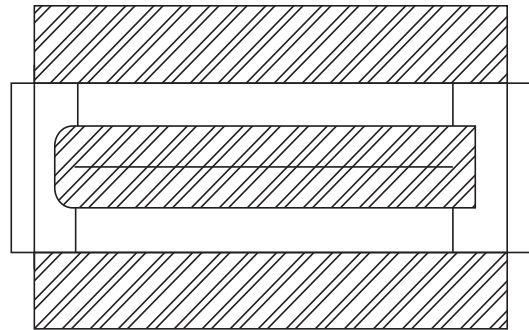

Side View

Casing Width = Diameter + 16"
Unit Length = 2 X Diameter (minimum 36" long)

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: