

SUBMITTAL SHEET

www.aerosonics.com



SOUND ATTENUATOR

TUBULAR
DOUBLE WALL
HOSPITAL GRADE
FIBERGLASS FILL

PRODUCT FEATURES


- **FILL:** Compressed fiberglass, encapsulated in polyethylene to eliminate erosion and absorption of gases and moisture. An acoustical stand-off is placed between the perforated baffle and the encapsulated fill to enhance performance.
- Tested in accordance with ASTM E-477
- **ASTM-E84 Rating Characteristics:**
Flamespread - 0
Smoke Developed - 15

CONSTRUCTION FEATURES


- Casing:**
12" - 24" 22 GA. Galvanized Steel
26" - 60" 18 GA. Galvanized Steel
- Baffle:**
24 GA. Perforated Galvanized Steel

MODELS

- DRAC-R**
 DRBC-R
 DRCC-R



End View

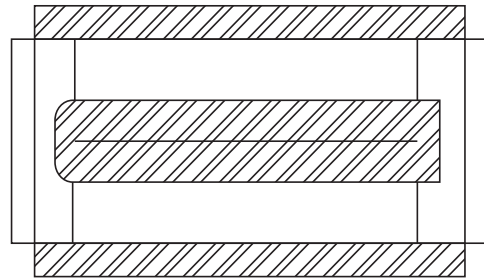

Side View

Casing Width = Diameter + 6"
Unit Length = 2 X Diameter (minimum 36" long)

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: